

NAME : AXSL01 STREET LIGHT




PRODUCT INTRODUCTION

- 1: High strength aluminum alloy die casting shell, impact level can reach IK09
- 2: Simple design, easy installation.
- 3: High flux, LUMINOUS EFFICACY up to 142lm/w
- 4: Constant light output function(CLO) ,DALI dimming, switch DIM
- 5: Tridonic / Meanwell / Philips driver and can be customized driver and other accessories


AXSL01 STREET LIGHT PERAMETER

| POWER | 50W | 80W | 120W | 180W |
|-------------------|-------------------------------|-------------|-------------|-------------|
| Lamp Efficiency | >138lm | >135lm | >135lm | >138lm |
| Luminous Flux | >6900lm | >10800lm | >16200lm | >24840lm |
| Power Factor | PF>0.93 | | | |
| Color Temperature | 3000K,4000K,5000K,5700K,6500K | | | |
| CRI | ≥80 | | | |
| Lifespan | 50000Hrs | | | |
| LENS | PC & Ledil PMMA | | | |
| Beam Angle | TypeI/ TypeII/Type III/90 ° | | | |
| Material | Aluminum and Glass | | | |
| IP Rating | IP66 | | | |
| Certification | CE,RoHS,LVD | | | |
| Dimension(mm) | 535*200*120 | 590*235*125 | 690*260*130 | 800*320*135 |
| Packing(mm) | 575*245*150 | 665*275*155 | 725*300*155 | 840*380*160 |
| Net Weight(Kg) | 4.4 | 5.6 | 6.6 | 8.9 |
| Gross Weight(Kg) | 5.4 | 6.6 | 7.7 | 10 |


50W AXSL01

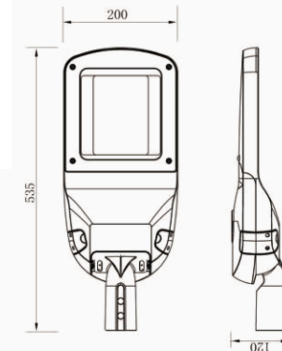

80W AXSL01

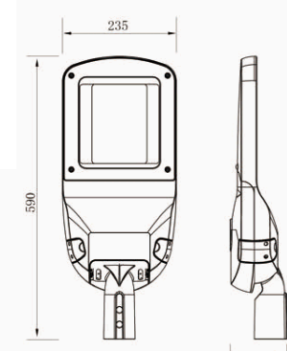

120W AXSL01

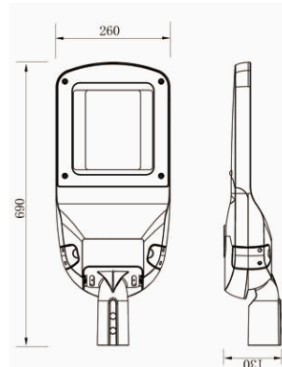

180W AXSL01

